


PN 10/16 - DN 50...200

KAT-A 1917

Product characteristics and benefits

- With flange end acc. to EN 1092-2
- Single chamber air valve in compact design
- High discharge capacity for large quantities of air
- Triple function air valve
- Venting function:
 - Large orifice to vent high quantities of air during draining the pipeline
 - Large orifice to release high quantities of air during filling the pipeline
 - Small orifice to release low quantities of air during operation under pressure
- Outlet female threaded acc. to DIN ISO 228 G 1 ¼", G 2 ½"
- Minimum operation pressure: 0.1 bar
- Low weight for easy handling
- Easy to maintain, all internal functional parts can be removed together
- Incrustation- and corrosion-free due to polyethylene PE housing

Materials

- Body: Polyethylene PE 100
- Bonnet: Stainless steel 1.4462
- Inner parts: Plastic (POM/PVC)
- Float: Polyethylene PE 100
- Sealing: NBR
- Cover flange and guide screws: Stainless steel
- Loose flange for flange connection: Steel with polypropylene (PP) coating

Versions

- Standard version as described
- For flange dimensions acc. to ANSI class150
- Higher temperatures possible at reduced pressure
- With non-return valve
- Lockable in open position for purging

Field of Application

- Chamber installation
- Installation in plants


Tests and approvals

- Final inspection test acc. to EN 12266 (DIN 3230 Part 4)

Note

Operating pressure at 20° C. Reduced maximum admissible operating pressure at higher temperatures (50° C max)

For proper installation and safe operation please follow the installation and operation instructions:
KAT-B 1917

Field of application


DN	PN	Maximum operating pressure [bar]	Maximum operating temperature for neutral liquids [°C]
50...200	16	16	20
200	10	10	20

Pressure test acc. to EN 12266

Test pressure body with water [bar]	Test pressure seat with water [bar]
24	17.6
16	11



Drawing

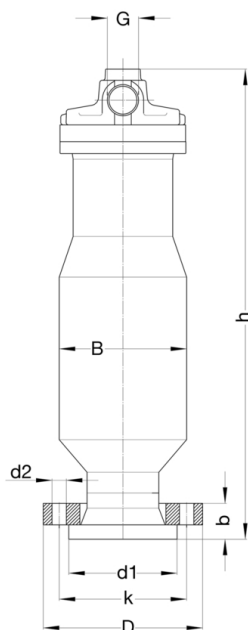

Technical data

PN 16


DN	50	80	100	150	200
G Screw connection [inch]	1 1/4"	1 1/4"	1 1/4"	2 1/2"	2 1/2"
B [mm]	160	160	160	225	225
D [mm]	165	200	220	285	340
b [mm]	35	38	38	50	63
d1 [mm]	102	136	156	212	268
d2 [mm]	18	18	18	22	22
h [mm]	665	595	590	700	690
k [mm]	125	160	180	240	295
No. of holes	4	8	8	8	12
Weight approx. [kg]	10.00	9.00	10.00	23.00	25.00
Volume approx. [m ³]	0.020	0.020	0.020	0.040	0.040

PN 10

DN	200
G Screw connection [inch]	2 1/2"
B [mm]	225
D [mm]	340
b [mm]	63
d1 [mm]	268
d2 [mm]	22
h [mm]	690
k [mm]	295
No. of holes	8
Weight approx. [kg]	25.00
Volume approx. [m ³]	0.040

Further information

Rate of air release in dependence of the internal pressure

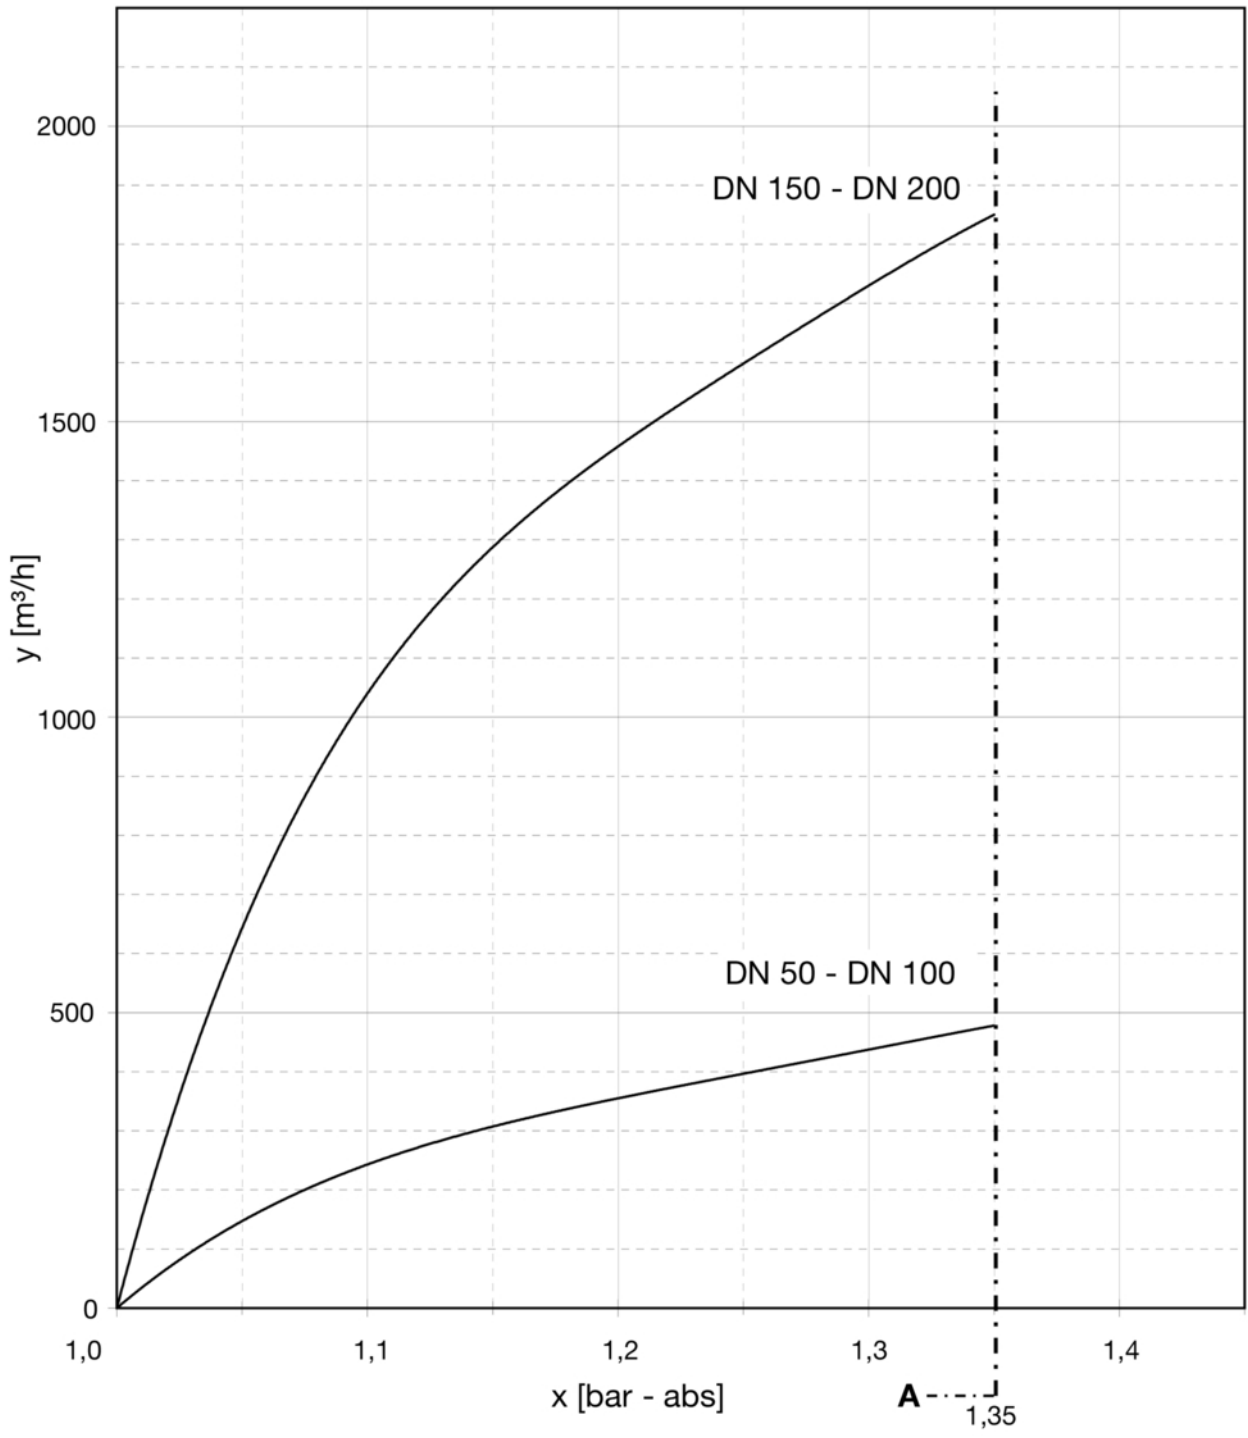


x: Internal pressure p [bar - absolute]
y: Air release rate Q [m^3/h]



Further information


Rate of air intake in dependence of the internal pressure

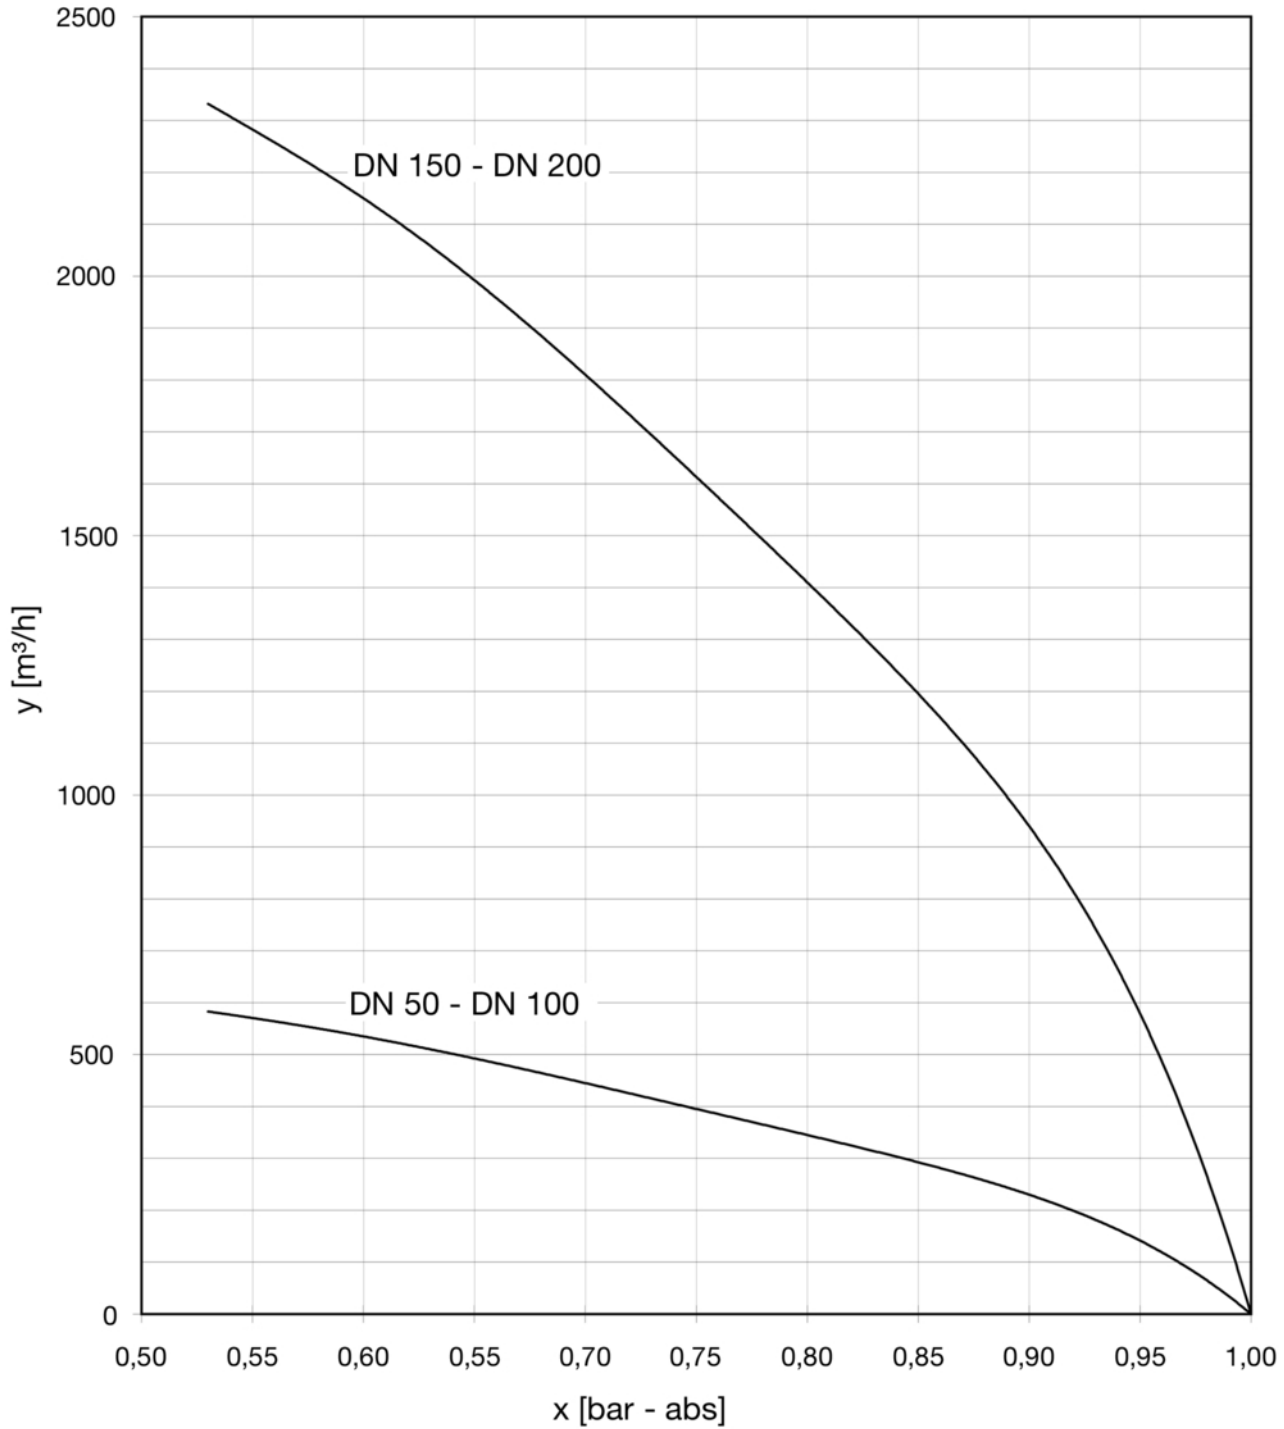

x: Internal pressure p [bar - absolute]
y: Air inflow rate Q [m³/h]

Further information

Rate of air release at full internal pressure

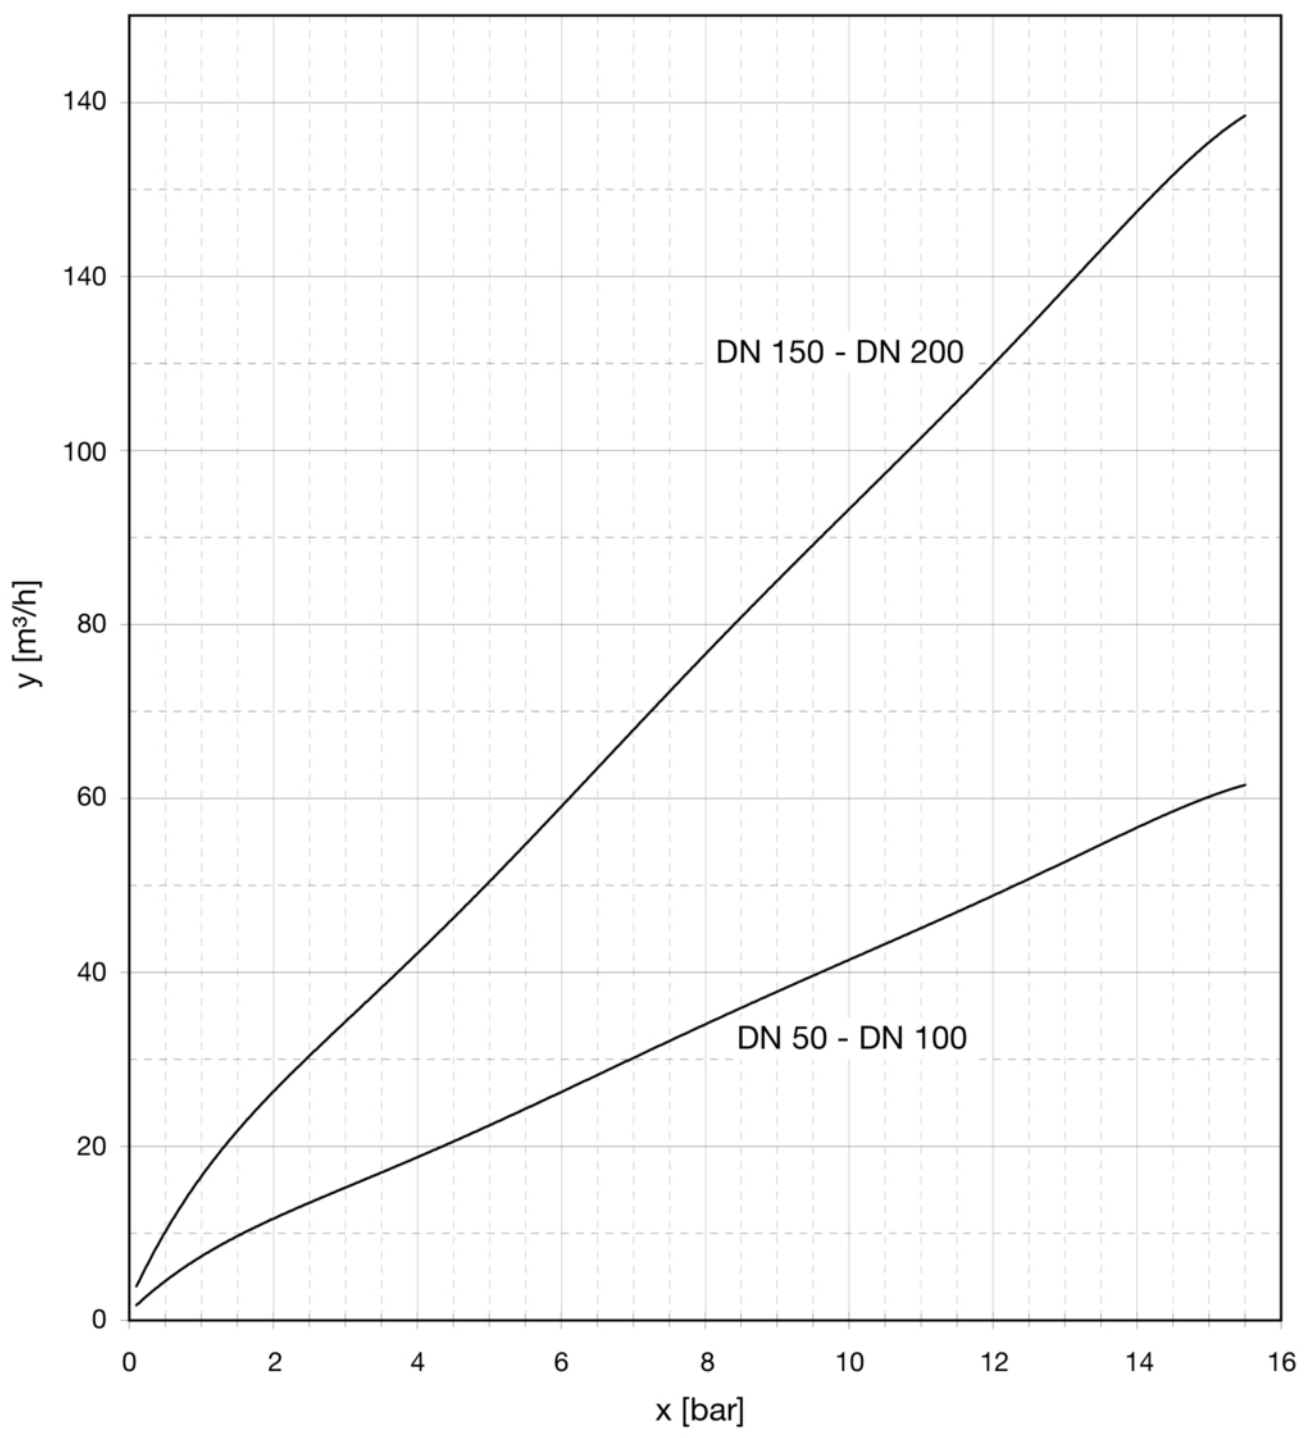

x: Operating pressure p in pipeline [bar]
y: Air release rate Q [m³/h]